


## Deckshield ID Intermediate Deck (1.5 mm)

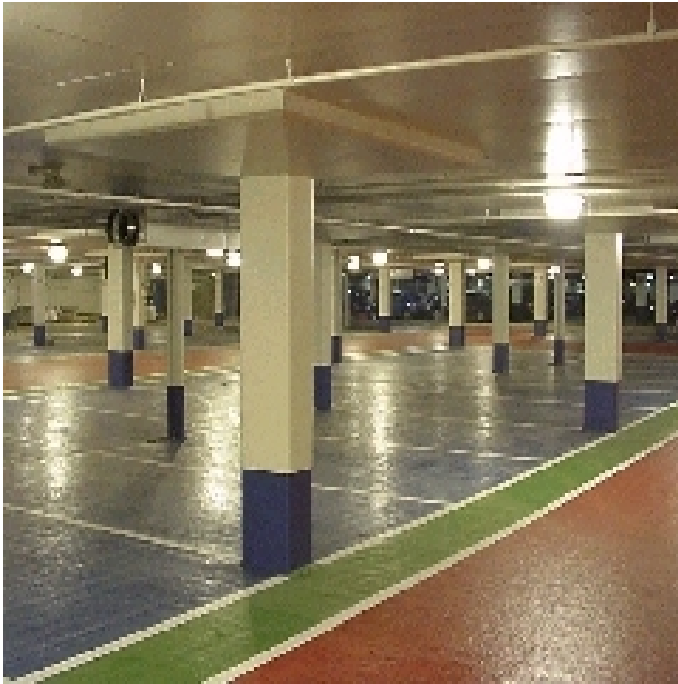

### Description

Deckshield ID is a flexible solvent free polyurethane car park deck coating system which provides a colourful crack bridging, waterproof wearing surface for intermediate decks of multi-storey car parks.

### Uses

Deckshield cosmetically enhances and reduces noise, making multi-storey car parks lighter, safer environments to visit. Deckshield is suitable for refurbishment of existing car parks and on new construction projects.


### Benefits:

- Aesthetically attractive – brightens up dull, dark, musty car parks
- Reduces noise – stops tyre squeal
- Hard wearing – abrasion resistant
- Solvent free
- Can be used over existing asphalt substrates
- Fire resistant
- Slip resistant
- Resistant to cracking
- Excellent bond strength
- Fast track installation

### Project References: -

Multi-storey car parks world-wide:- Kuala Lumpur International Airport; Istanbul Airport; Tsing Yi Car Park, Hong Kong; NCP; Tesco; Marks and Spencer and local authority car parks throughout the UK.

### System Design

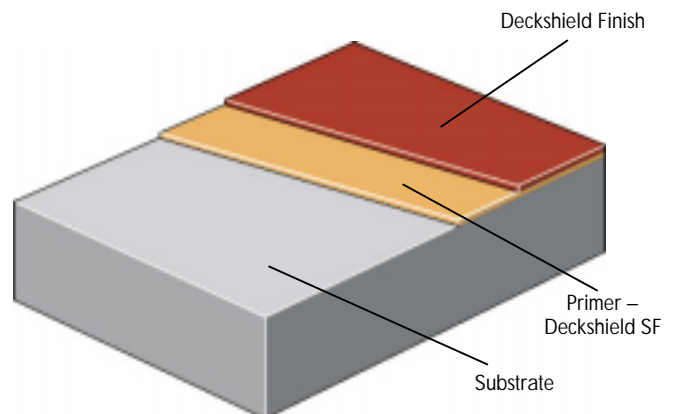

### Standard colour chart



Arabian Yellow RAL 1005



Forest Green BS 14E53



Dark Grey BS 00A13



Tile Red BS 04D45



Mid Grey BS 18B21



Traffic Blue RAL 5017

The applied colours may differ slightly from the examples shown above. Contact our customer services for a true colour sample or a special colour match.

## Model Specification

Product: Deckshield ID system.

Finish: Gloss

Thickness: 1.5 mm

Colour: \_\_\_\_\_

Preparatory work and application in accordance with manufacturers instructions.

Manufacturer: Flowcrete Car Park Structures

Telephone: Customer Service - +44 (0) 1270 753000

The installation should be carried out by a Deckshield licensed contractor with a documented quality assurance scheme.

## Products Included in this System

Primer: Deckshield SF @ 1.0 - 1.5 kg/m<sup>2</sup> and fully blind with

Deckshield Quartz 0.4 – 1.2 mm @ 2.5 kg/m<sup>2</sup>

Deckshield Finish @ 0.8 kg/m<sup>2</sup>

Detailed application instructions are available upon request.

## Focus on the Floorzone

Flowcrete Car Park Structures is a division of the Flowcrete Group, world leaders in specialist industrial and commercial flooring. Systems available include: underfloor heating systems, floor screeds, surface damp proof membranes, decorative floor finishes, seamless terrazzo, car park deck waterproofing, tank lining systems... to name just a few.

Our objective is to satisfy your Floorzone needs.

## Flooring Design Service

Special corporate colours and designs can be produced to special order.

## Installation Service

The installation should be carried out by a Deckshield licensed contractor with a documented quality assurance scheme.

Obtain details of our licensed contractors by contacting our customer service team or enquiring via our web site

[www.deckshield.co.uk](http://www.deckshield.co.uk)

## Substrate Requirements

Concrete or screed substrate should be a minimum of 25 N/mm<sup>2</sup>, free from laitance, dust and other contamination. Substrate should be dry to 75% RH as per BS8204.

## Life Expectancy

8 – 10 years - subject to correct maintenance regime.

## System Performance Guide

The table below shows how well the system complies with different characteristics.

A scale of 1 – 5 where 5 is the best value.

5 Excellent, 4 Very Good, 3 Good (Pass), 2 Fair, 1 Poor

Fire Safety	4	Impermeability	5
Slip Resistance	5	Cleanability	5
Thermal Resistance	3	Wear Resistance	4
Heavy Traffic	2	Chemical Resistance	4

## Technical Information

The figures that follow are typical properties achieved in laboratory tests at 20°C and at 50% Relative Humidity.

Fire Resistance	BS476:Part 3: Designated EXT.FF.AA
Slip Resistance	TRRL Pendulum Slip Test Dry 92 Wet 46
Temperature Resistance	Softens over 70°C, hardens on cooling
Water Permeability	Nil – Karsten test (Impermeable)
Chemical Resistance	Go to <a href="http://www.deckshield.co.uk">www.deckshield.co.uk</a> Resistant to petrol, diesel, antifreeze, hydraulic fluid, chlorides and battery acids.
Resistance to chloride ions	DOT BD47/94: Appendix B, Method B4,2(d). Result: No chloride ion penetration after 28 days
Abrasion Resistance	Taber Abrader: 40 mg loss per 1000 cycles (1 kg load using H-22 wheels)
Tensile / Elongation N/mm <sup>2</sup> /%	BS2782:Part 3 Method 320A All samples heat aged at 70°C 1 day 5.4/50.4 7 day 7.15/40.2 28 day 7.17/30.5
Tear Strength	MOAT 27 Method 5.4.1 Test Result = 192 N
Bond Strength	Greater than cohesive strength of 25 N/mm <sup>2</sup> concrete. >1.5 MPa.

## Speed of Cure

	10°C	20°C	30°C
Light traffic	30 hrs	16 hrs	10 hrs
Full traffic	36 hrs	24hrs	16 hrs
Full chemical cure	12 days	7 days	5 days

## Aftercare - Cleaning and Maintenance

Clean regularly using a single or double headed rotary scrubber drier in conjunction with a mildly alkaline detergent.

## Further Information

To ensure you are specifying a fit for purpose flooring for your project please consult our Technical Advisors on the number below or visit our website to register your interest in specifying one of the most durable floors on the market.

## Important Note

Flowcrete's products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request.

29 October 2003 MP

Flowcrete UK Ltd.  
Booth Lane, Moston, Sandbach,  
Cheshire, CW11 3QF. UK  
Tel: +44 (0)1270 753000  
Fax: +44 (0)1270 753333  
Web: [www.flowcrete.com](http://www.flowcrete.com)  
email: [help@flowcrete.com](mailto:help@flowcrete.com)

Peran AB  
SE-284 80 Perstorp  
Sweden  
Tel: +46 435 380 00  
Fax: +46 435 314 98  
Web: [www.peran.com](http://www.peran.com)  
Email: [info@peran.com](mailto:info@peran.com)

Flowcrete Asia Sdn Bhd,  
Lot 7484A, Jalan 2,  
Taman Selayang Baru,  
68100 Batu Caves, Selangor,  
Darul, Ehsan, Kuala Lumpur, Malaysia.  
Tel: +603 6120 6575  
Fax: +603 6120 6577  
Web: [www.flowcrete.com.my](http://www.flowcrete.com.my)  
Email: [help@flowcrete.com.my](mailto:help@flowcrete.com.my)

Flowcrete UK Ltd. is a division of Flowcrete Group plc

UK Spain France Belgium Germany Norway Sweden Czech Republic Poland UAE Malaysia Thailand Australia Hong Kong China Argentina Brazil USA