


## Self Level Plus (3 - 30 mm)

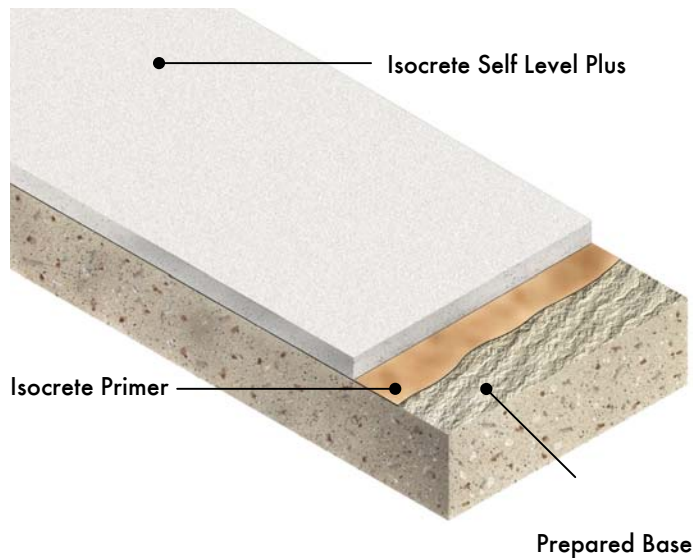

### Description

A fast drying pump applied cement-based underlayment, for easy levelling of concrete floors before the installation of floor coverings. e.g. vinyl, carpets, ceramic tiles, wood block, linoleum or cork.

### Uses

Suitable for floors in office buildings, shops, public buildings, schools, hospitals, airports and prisons.

Isocrete Self Level Plus is laid at 3 - 30mm, however an 8 mm average thickness is a typical expectation on a reasonably level base.

For a screed to receive an epoxy resin finish in areas taking light traffic use Isocrete 1500. For a flowing screed for industrial use, use Flowscreed Industrial Top from Flowcrete Specialist Flooring.

### Benefits

- Fast track application
- Self levelling
- Rapid installation - 2000m<sup>2</sup> per day for 7 mm thickness, under suitable conditions
- Fast setting - walk on after 2 - 4 hours under suitable conditions
- Fast drying - install moisture sensitive finishes after 24 hours dependent on thickness, ambient temperatures and humidity
- Single pack
- Protein free - will not harbour bacteria

### Project References

Chancery Court, London; Eagle Wharf; Edinburgh Airport; Gordon's Gin; Heathrow Airport; Hereford Hospital; Wythenshawe Hospital.



## Model Specification

Product: Isocrete Self Level Plus  
Thickness: \_\_\_\_\_ between 3 – 30 mm  
Preparatory work and application in accordance with manufacturers instructions.  
Manufacturer: Isocrete Commercial Flooring  
Telephone: Customer Service - +44 (0) 1270 753753

## Installation Service

The installation should be carried out by an Isocrete licensed contractor with a documented quality assurance scheme. Obtain details of our licensed contractors by contacting our customer service team or enquiring via our web site [www.isocrete.com](http://www.isocrete.com)

## Products Included in this System

Primer: Isocrete Primer @ 0.05 kg/m<sup>2</sup>  
Or if dpm required:  
DPM: Aqualock @ 0.5 kg/m<sup>2</sup>  
Sand scatter: Silica Sand grade 10/16 (1 – 1.7 mm) @ ~2 kg/m<sup>2</sup>  
Floor Screed: Isocrete Self Level Plus @ 11.9 kg/m<sup>2</sup> for 7 mm

Detailed application instructions are available upon request.

## Substrate Requirements

Concrete or screed substrate should be a minimum of 25N/mm<sup>2</sup>, free from laitance, dust and other contamination. The substrate should be dry to 75% RH as per BS8204 and free from rising damp and ground water pressure. If above 75% RH, or no damp proof membrane is present Isocrete Aqualock can be incorporated directly beneath the Isocrete Self Level Plus system, enabling the immediate installation of floor finishes once the screed has dried.

## Protection on Completion

Ensure the screed is not subject to draughts during the first 6 hours of curing as this may lead to cracking and crazing. Tape up doorways with polythene to prevent air movement. Prevent contamination by following trades e.g. plastering, including water spillage.

## Focus on the Floorzone

Isocrete Commercial Flooring is a division of the Flowcrete Group, world leaders in specialist industrial and commercial flooring. Systems available include: underfloor heating systems, floor screeds, surface damp proof membranes, decorative floor finishes, seamless terrazzo, car park deck waterproofing, corrosion resistant systems... to name just a few. Our objective is to satisfy your Floorzone needs.

## Important Note

Isocrete's products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request.

## System Performance Guide

The table below shows how well the system complies with different characteristics. A scale of 1 – 5 where 5 is the best value. 5 Excellent, 4 Very Good, 3 Good (Pass), 2 Fair, 1 Poor

Fire Safety	5	Shrinkage	5
Compressive Strength	4	Drying Time	4
Impact Resistance	4	Wear Resistance	3
Thermal Resistance	3	Foot Traffic	5

## Technical Information

The figures that follow are typical properties achieved in laboratory tests at 20°C and at 50% Relative Humidity.

Fire Resistance	BS5476:Part 7: Spread of Flame Class 1
Impact Resistance	BS8204 Part1 Cat: A
Thermal Resistance	50 °C max
Compressive Strength (28 days)	30 N/mm <sup>2</sup> (BS EN 196)
Flexural Strength (28 days)	8 N/mm <sup>2</sup> (BS EN 196)
Adhesion to C30 Concrete (28 days)	> 1N/mm <sup>2</sup>
Shrinkage	< 0.06%
Maximum particle size	0.5 mm
Protein content	Nil
Thickness	3 – 30 mm
Laying temperature	5 – 30 °C
Flow ring (65 mm diam. x 40 mm high)	230 – 250 mm
Mix ratio per 25kg	4.5 – 5 litres water

## Speed of Cure

	10°C	20°C
Walk on	4 - 8 hrs	2 - 4 hrs
Full traffic	2 days	2 days

## Drying Time

Moisture sensitive floor finishes can be installed when the screed is dry to 75% RH as per BS8203, typically after 24 hours, dependent on thickness and ambient conditions (20°C, 50% RH). After 6 hours curing without draughts ensure the area has sufficient ventilation to allow the screed to dry.

## Further Information

To ensure you are specifying a fit for purpose flooring for your project please consult our Technical Advisors on the number below or visit our website to register your interest in specifying one of the most durable floors on the market.

Flowcrete UK Ltd.  
Booth Lane, Moston, Sandbach,  
Cheshire, CW11 3QF. UK  
Tel: +44 (0)1270 753000  
Fax: +44 (0)1270 753333  
Web: [www.flowcrete.com](http://www.flowcrete.com)  
email: [help@flowcrete.com](mailto:help@flowcrete.com)

Peran AB  
SE-284 80 Perstorp  
Sweden  
Tel: +46 435 380 00  
Fax: +46 435 314 98  
Web: [www.peran.com](http://www.peran.com)  
Email: [info@peran.com](mailto:info@peran.com)

Flowcrete Asia Sdn Bhd,  
Lot 7484A, Jalan 2,  
Taman Selayang Baru,  
68100 Batu Caves, Selangor,  
Darul, Ehsan, Kuala Lumpur, Malaysia.  
Tel: +603 6120 6575  
Fax: +603 6120 6577  
Web: [www.flowcrete.com.my](http://www.flowcrete.com.my)  
Email: [help@flowcrete.com.my](mailto:help@flowcrete.com.my)

Flowcrete UK Ltd. is a division of Flowcrete Group plc

UK Spain France Belgium Germany Norway Sweden Czech Republic Poland UAE Malaysia Thailand Australia Hong Kong China Argentina Brazil USA